



Microchannel electrokinetics of charged analytes in buffered solutions near floating electrodes

Andersen, Mathias Bækbo; Wolfcale, Trevor; Gregersen, Misha Marie; Pennathur, Sumita; Bruus, Henrik

Publication date:
2009

Document Version
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

Citation (APA):

Andersen, M. B. (Invited author), Wolfcale, T. (Invited author), Gregersen, M. M. (Invited author), Pennathur, S. (Invited author), & Bruus, H. (Invited author). (2009). Microchannel electrokinetics of charged analytes in buffered solutions near floating electrodes. Sound/Visual production (digital)

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Microchannel electrokinetics of charged analytes in buffered solutions near floating electrodes

Mathias Bækbo ANDERSEN¹, Trevor WOLFCAL², Misha Marie GREGERSEN¹, Sumita PENNATHUR², and Henrik BRUUS¹

¹Department of Micro- and Nanotechnology, Technical University of Denmark, DTU Nanotech, Building 345 East, DK-2800 Kongens Lyngby, Denmark
Mathias.Andersen@nanotech.dtu.dk, Misha.Gregersen@nanotech.dtu.dk, Henrik.Bruus@nanotech.dtu.dk

²Department of Mechanical Engineering, University of California Santa Barbara, Engineering II Building, Santa Barbara, CA 93106-5070, USA
timothy_wolfcale@uail.ucsb.edu, sumita@engineering.ucsb.edu

We present both experimental and numerical studies of nonlinear electrokinetic flow of buffered solutions seeded with dilute analytes in a straight microchannel (0.6 μm high, 250 μm wide, and 9000 μm long) with a 0.15 μm high 60 μm wide electrode situated at the bottom center of the channel. Such studies will enable a fundamental understanding of nonlinear transport effects of ions in electrolyte systems with a significant Debye screening layer. Initial experimental studies have shown an order of magnitude increase of concentration near the electrodes, but numerical studies have so far failed to accurately predict such behavior in these flow regimes. Experimentally, using conventional fluorescence microscopy, we investigated the concentration gradient (as well as the associated electroosmosis, induced-charge electro-osmosis, and electrophoresis) of the charged analyte near the floating electrode as a function of analyte (1 to 10 μM fluorescein and bodipy) and buffer (1 to 10 mM borate and phosphate) concentrations and an externally applied voltage drop (50 to 100 V) along the channel. We have implemented a nonlinear continuum kinetics model of the system involving the electric potential, the buffer flow velocity, the pressure, and the four ionic concentration fields and compared the resulting numerical simulations with experiments.

Microchannel electrokinetics of charged analytes in buffered solutions near floating electrodes

GAMM-2009, Gdansk, Poland
9 February 2009

Mathias B. Andersen, Misha M. Gregersen, Henrik Bruus
Technical University of Denmark
&
Trevor Wolfcale and Sumita Pennathur
University of California Santa Barbara

www.nanotech.dtu.dk/microfluidics

The DTU theory team



Mathias Bækbo Andersen

MSc student



Misha Marie Gregersen

PhD student



Henrik Bruus

Professor

The UCSB experiment team



Trevor Wolfcale


MSc student



Sumita Pennathur

Assoc. Professor

Induced-charge electro-osmosis: UCSB experimental setup I


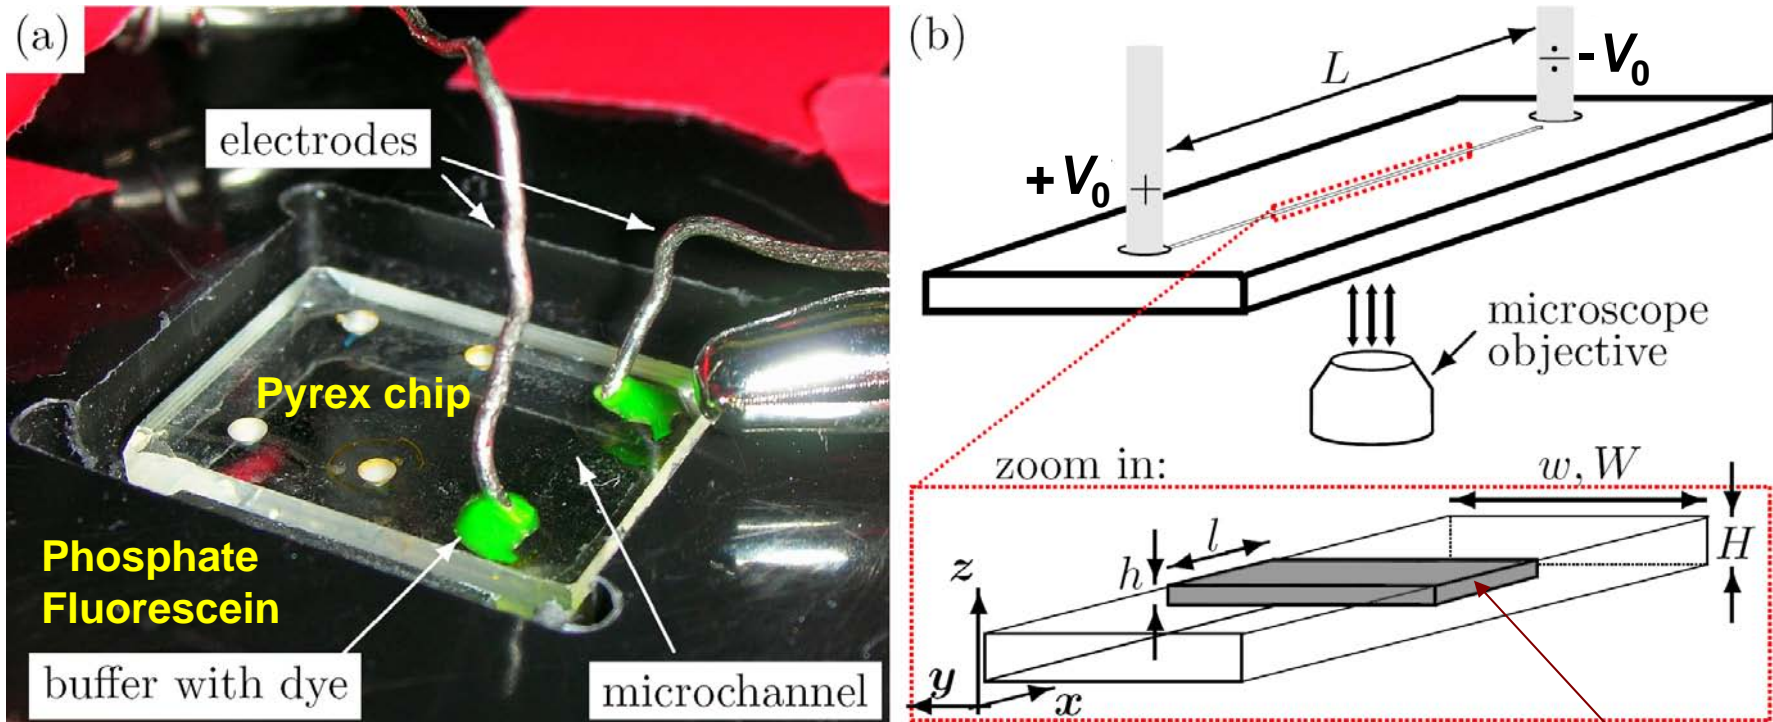


Extreme aspect ratios – Debye layer overlap

- $L = 9000.00 \mu\text{m}$
- $w = 250.00 \mu\text{m}$
- $l = 60.00 \mu\text{m}$
- $H = 0.50 \mu\text{m}$
- $\lambda_D = 0.03 \mu\text{m}$

un-biased
Pt electrode


Induced-charge electro-osmosis: UCSB experimental setup II

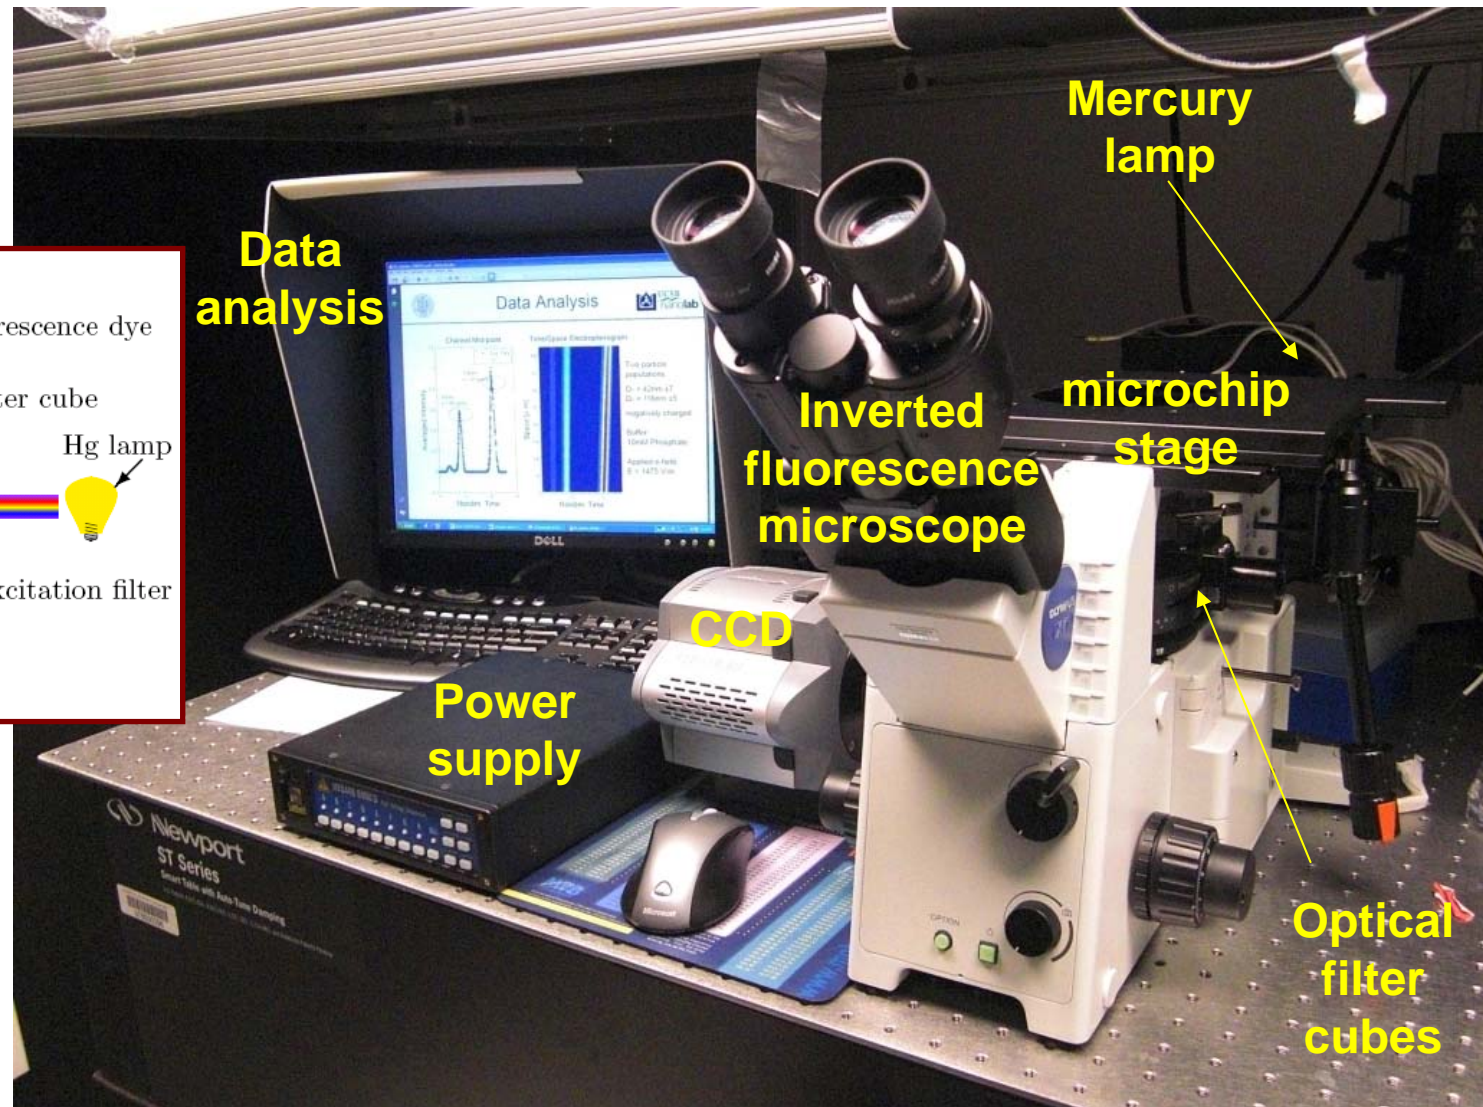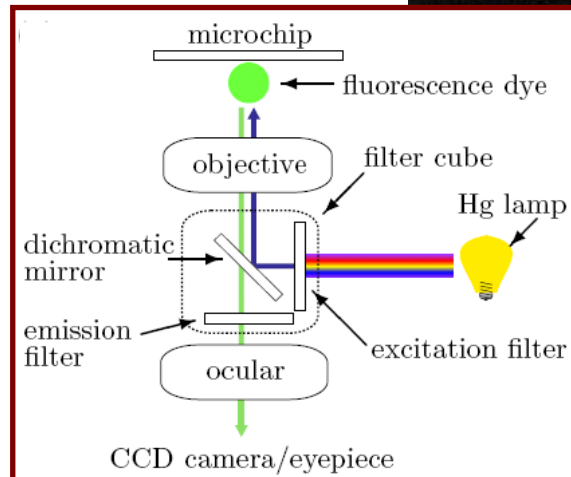

The continuum description of the electric screening in electrolytes: the double layer

➤ Governing equations


- Navier-Stokes equation \mathbf{u} $\rho [\partial_t \mathbf{u} + (\mathbf{u} \cdot \nabla) \mathbf{u}] = -\nabla p + \eta \nabla^2 \mathbf{u} - Ze(c_+ - c_-) \nabla \phi$
- Incompressibility p $\nabla \cdot \mathbf{u} = 0$
- Electrostatic Maxwell eq. ϕ $\nabla \cdot (\epsilon \nabla \phi) = -Ze(c_+ - c_-)$
- Nernst-Planck equation \mathbf{J} $\mathbf{J}_i = -\frac{D_i}{k_B T} c_i \nabla \mu_i + \mathbf{u} c_i$
- Continuity equation c $\mu_i = \mu_0 \pm Ze\phi + k_B T \ln \frac{c_{\pm}}{c_0}$
 $\nabla \cdot \mathbf{J}_i = -\partial_t c_i$

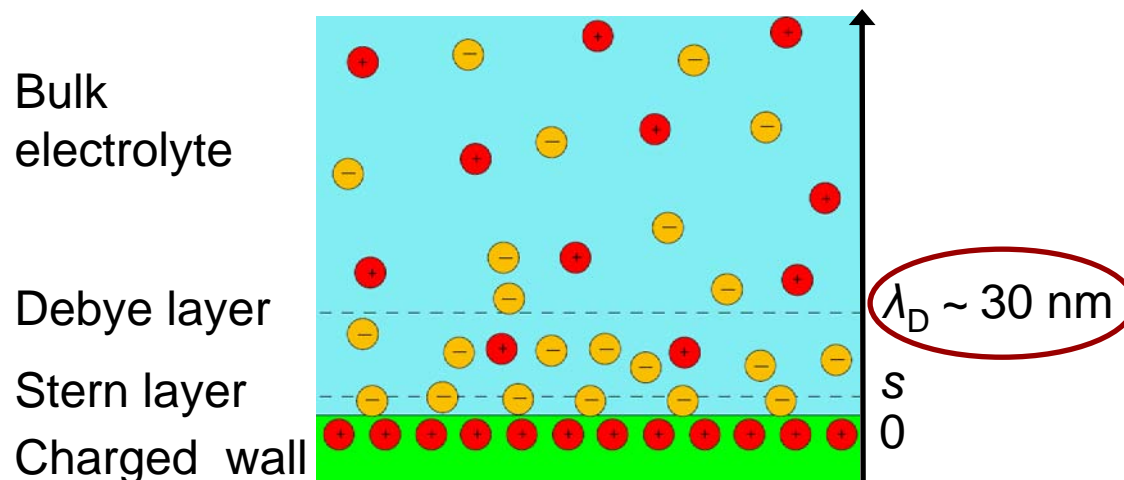



Induced-charge electro-osmosis:

Basic principle

- An external potential difference is applied ($+V_0$ and $-V_0$) to electrolyte
- Induced polarization charge appears in the metallic electrode
- Ions in the electrolyte screens out the E -field normal to the electrode
- The tangential E -field drives an ionic current along the dielectric
- The moving ions drags the liquid along the dielectric
- Flow-rolls are consequently induced in the electrolyte

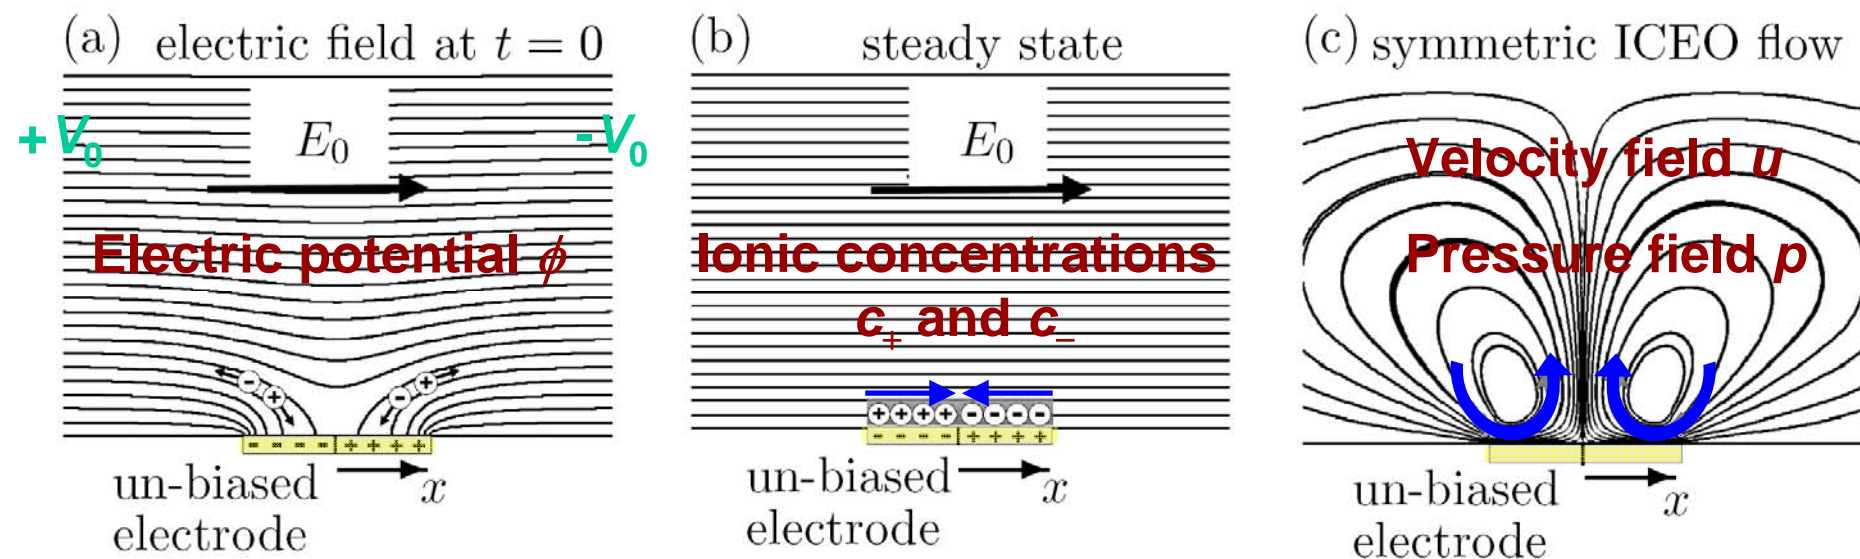

Induced-charge electro-osmosis: UCSB experimental setup III

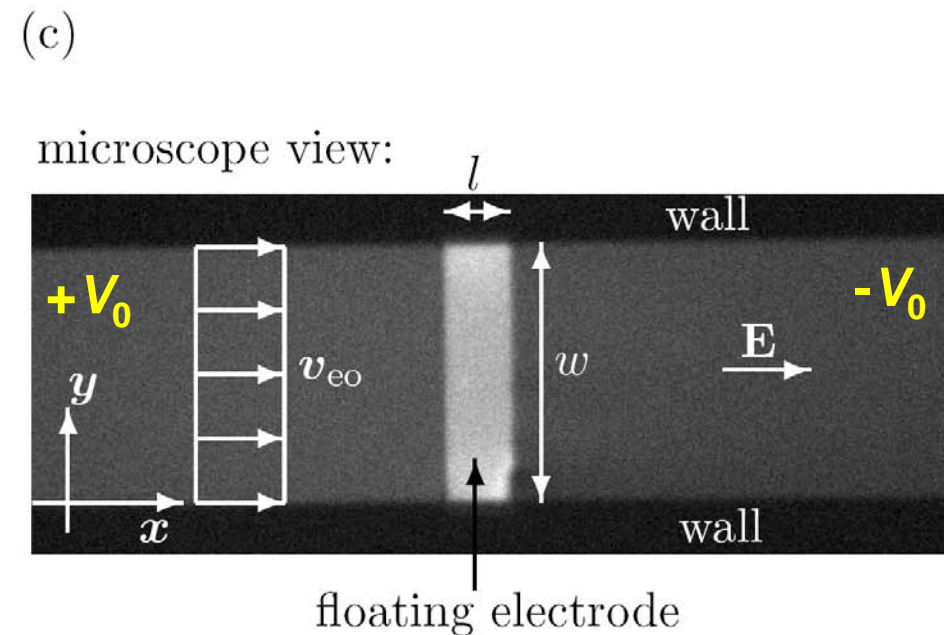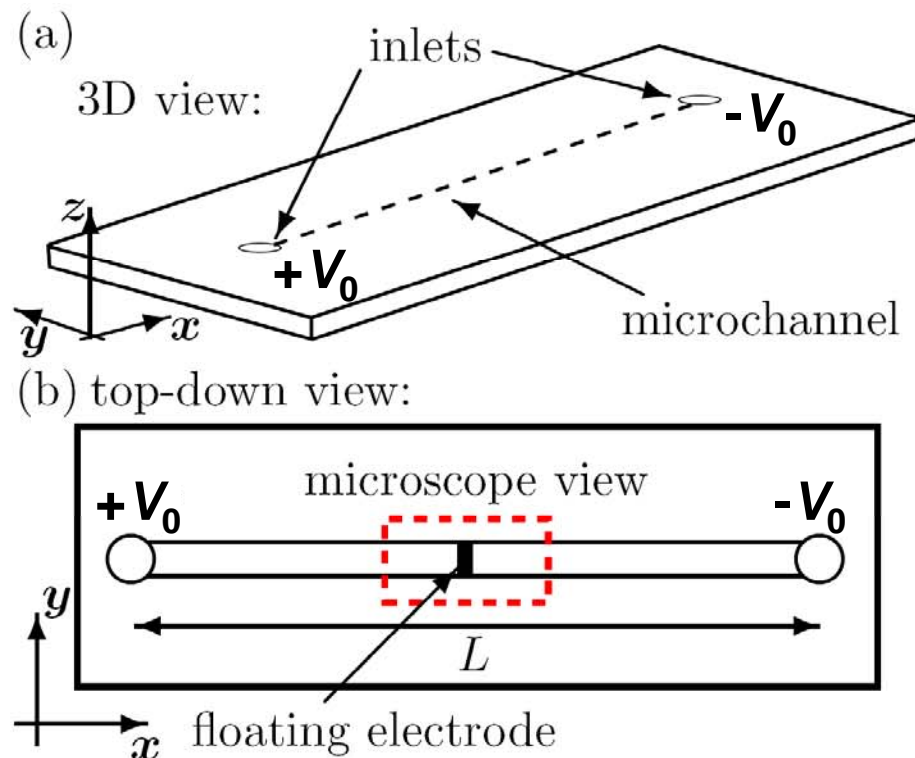


Experimental parameters and calibration of fluorescent detection

Experimental Parameters

Electric Fields	Ion/Analyte Densities
± 13.3 kV/m	1 mM / 1 mM
± 26.6 kV/m	1 mM / 100 mM
± 39.9 kV/m	1 mM / 10 mM
± 53.2 kV/m	1 mM / 1 mM
± 66.5 kV/m	10 mM / 1 mM
± 79.8 kV/m	10 mM / 100 mM
± 93.1 kV/m	10 mM / 10 mM
± 106.4 kV/m	10 mM / 1 mM
± 119.7 kV/m	



Electrode Geometries	Analytes
Ellipsoid	Rhodamine 6G (positive)
circle	Bodipy DISulfonate
Square	Fluorescein (negative)

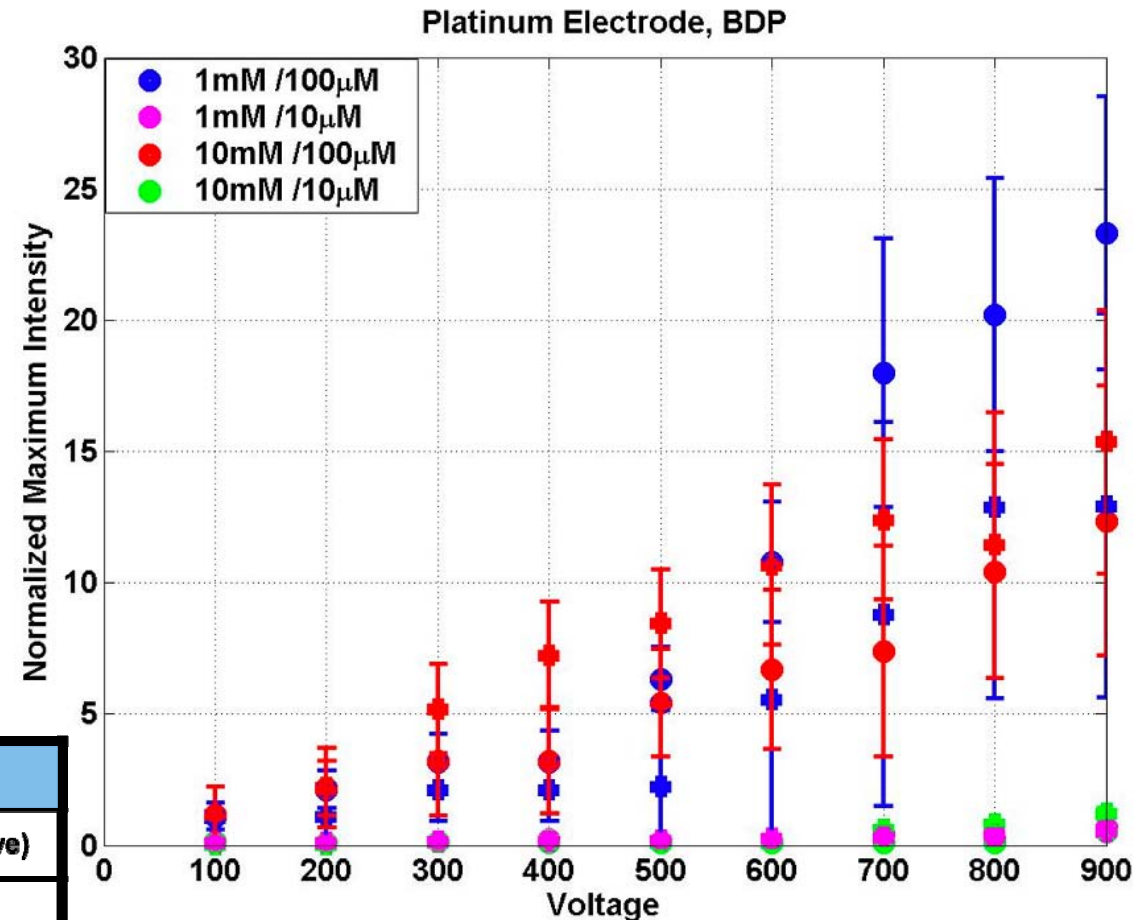


Real-time CCD recordings of one experiment

Transverse average of
the fluorescence signal


Top view

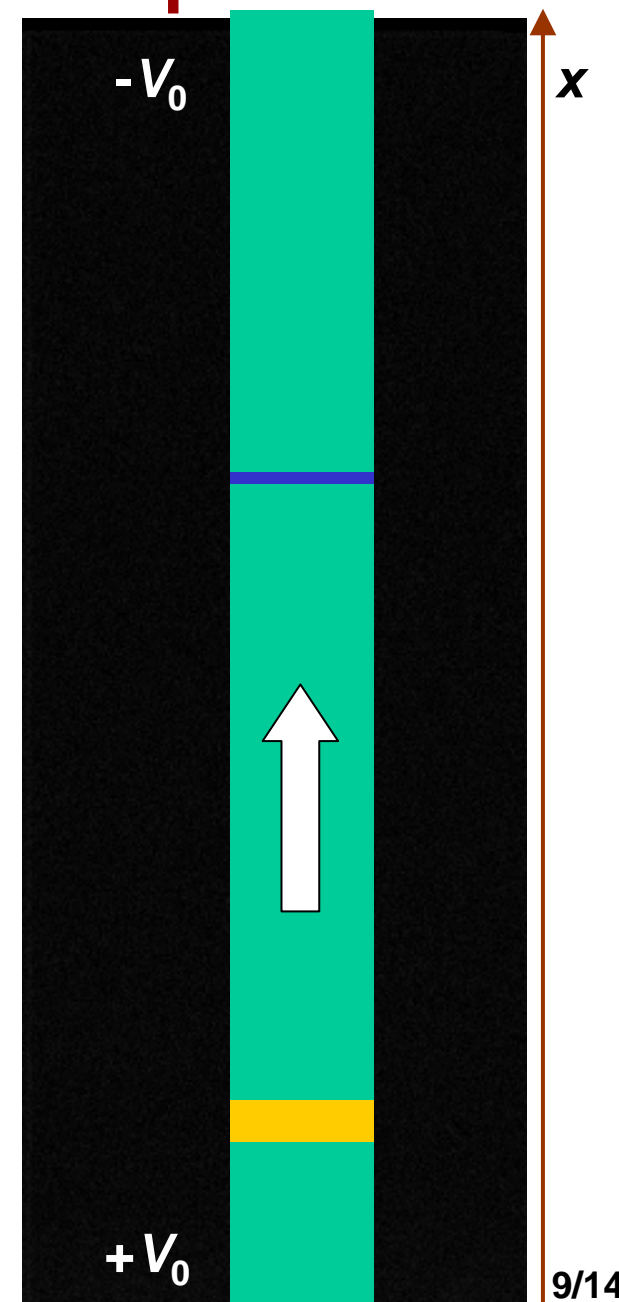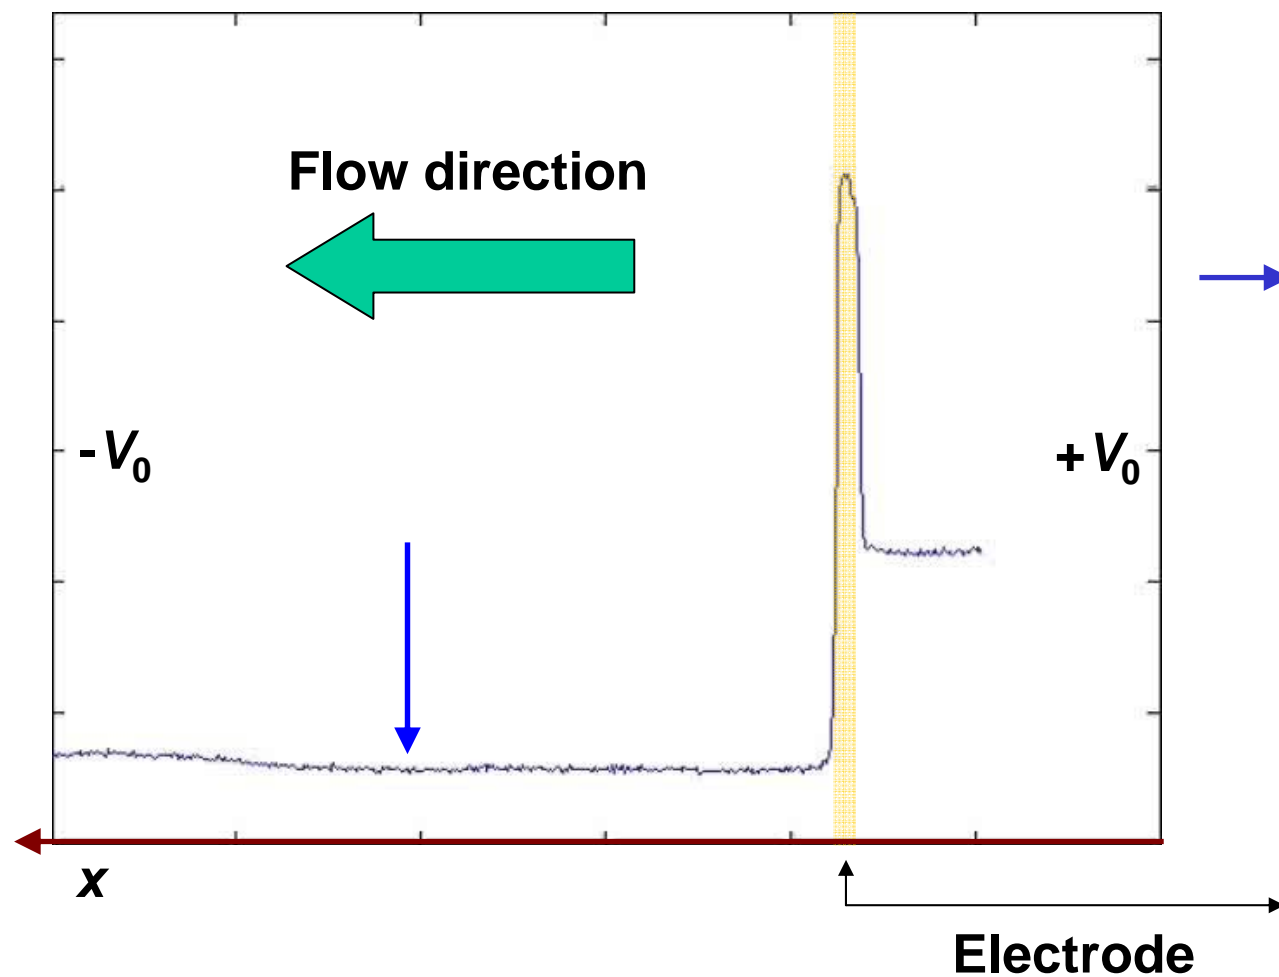

Theoretical model: the 2D computational domain



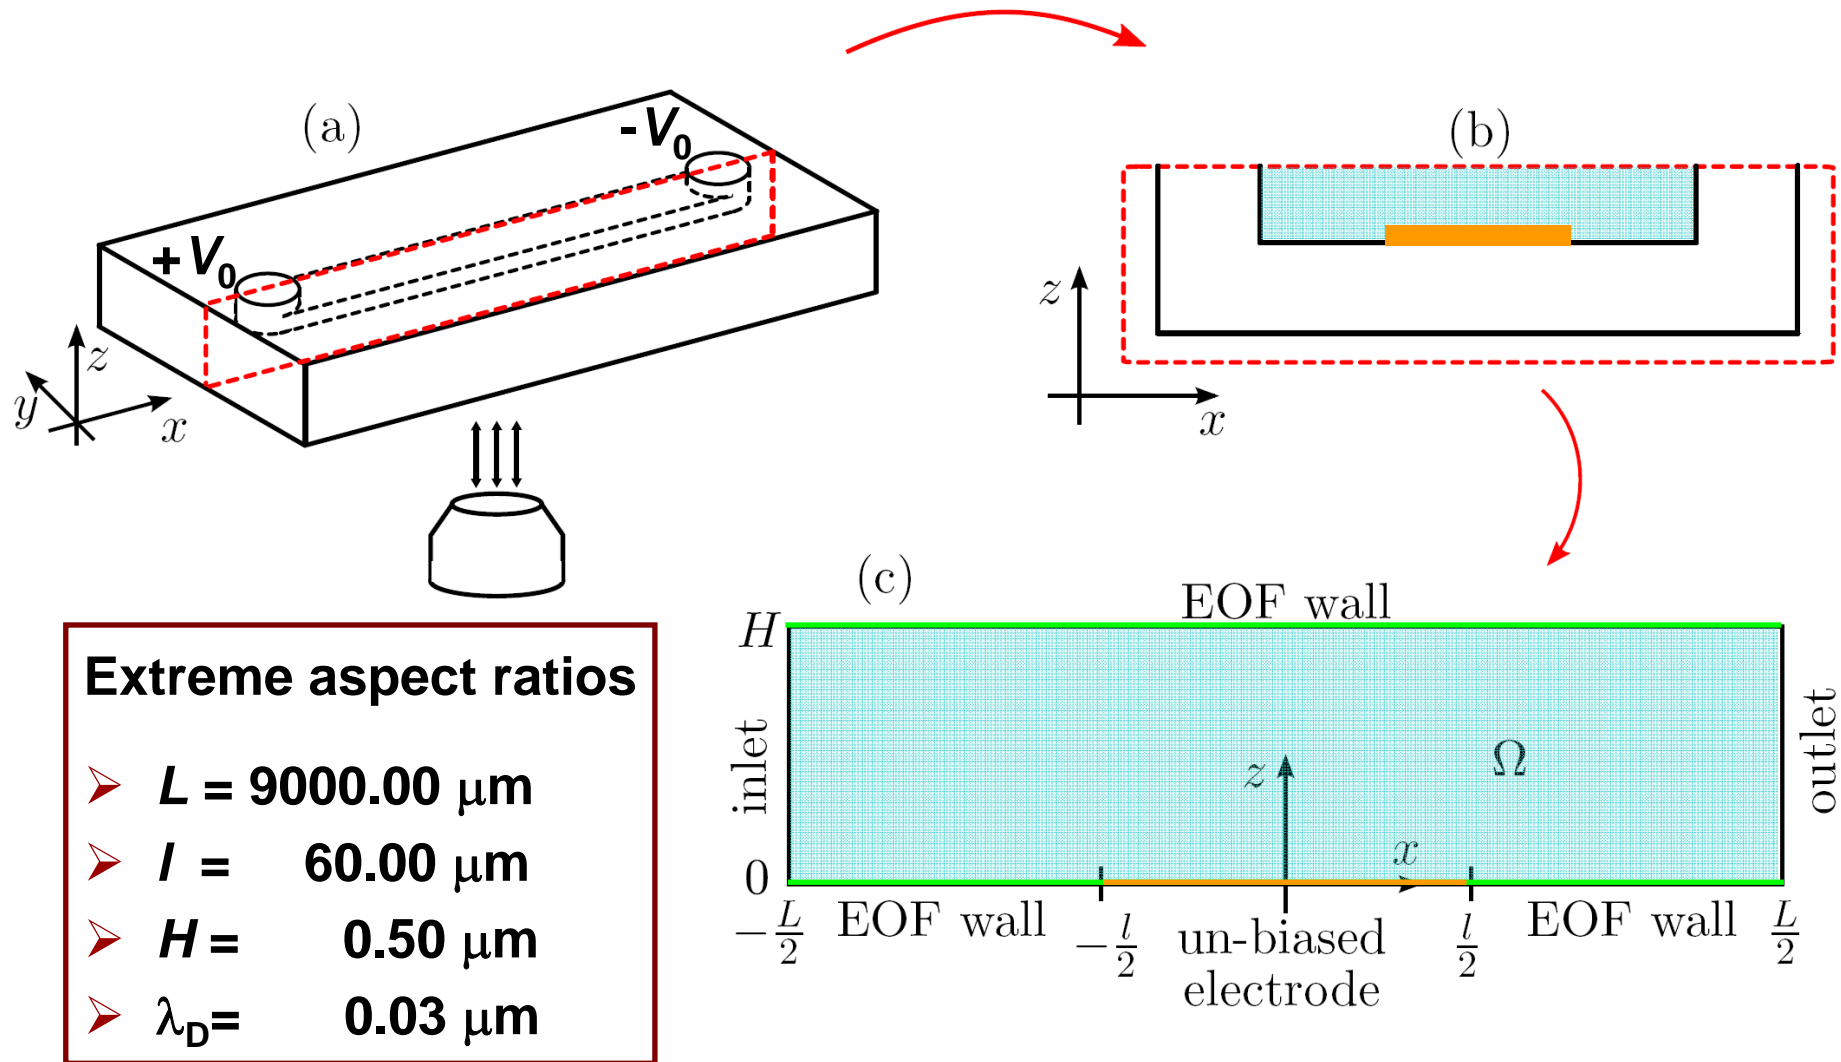



Theoretical model: Induced-charge electro-osmosis in microchannels

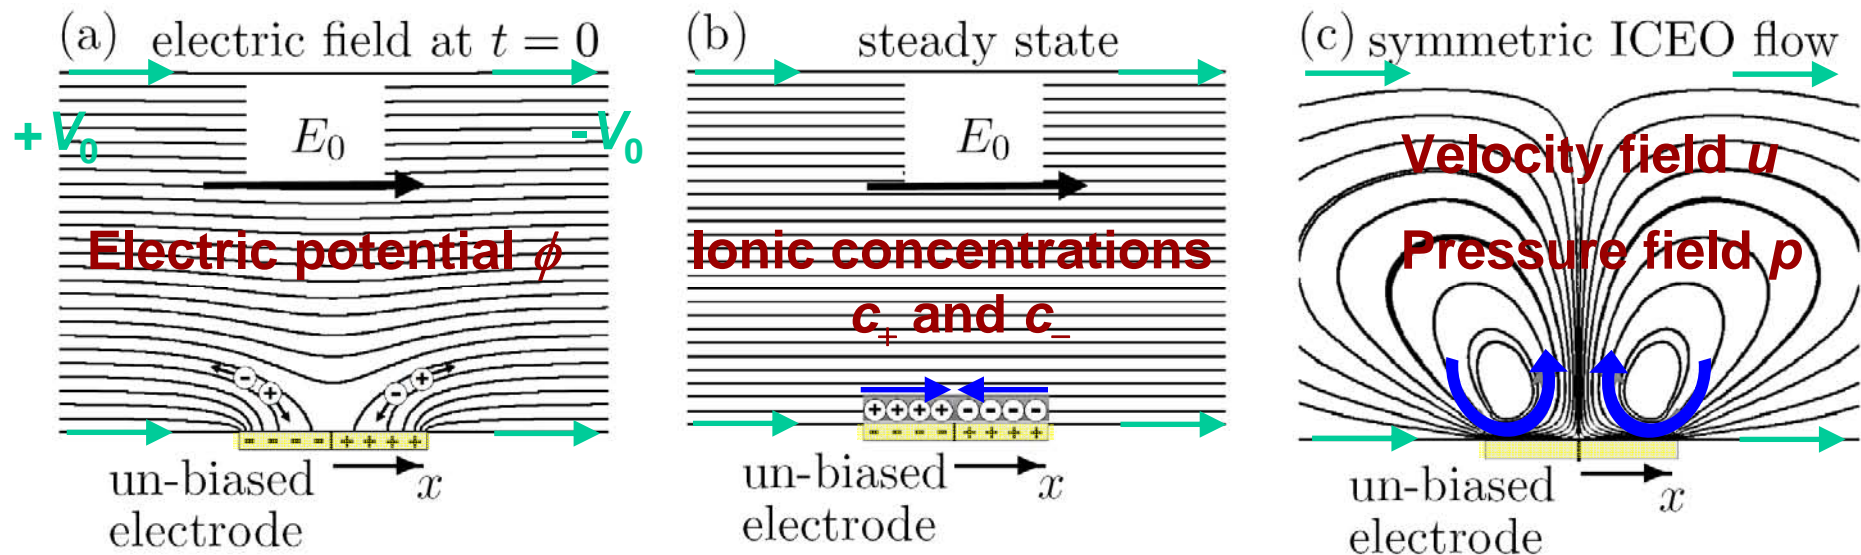

The symmetry is broken by the EO-flow from the surrounding walls

Theoretical model: potential, pressure and velocity profiles

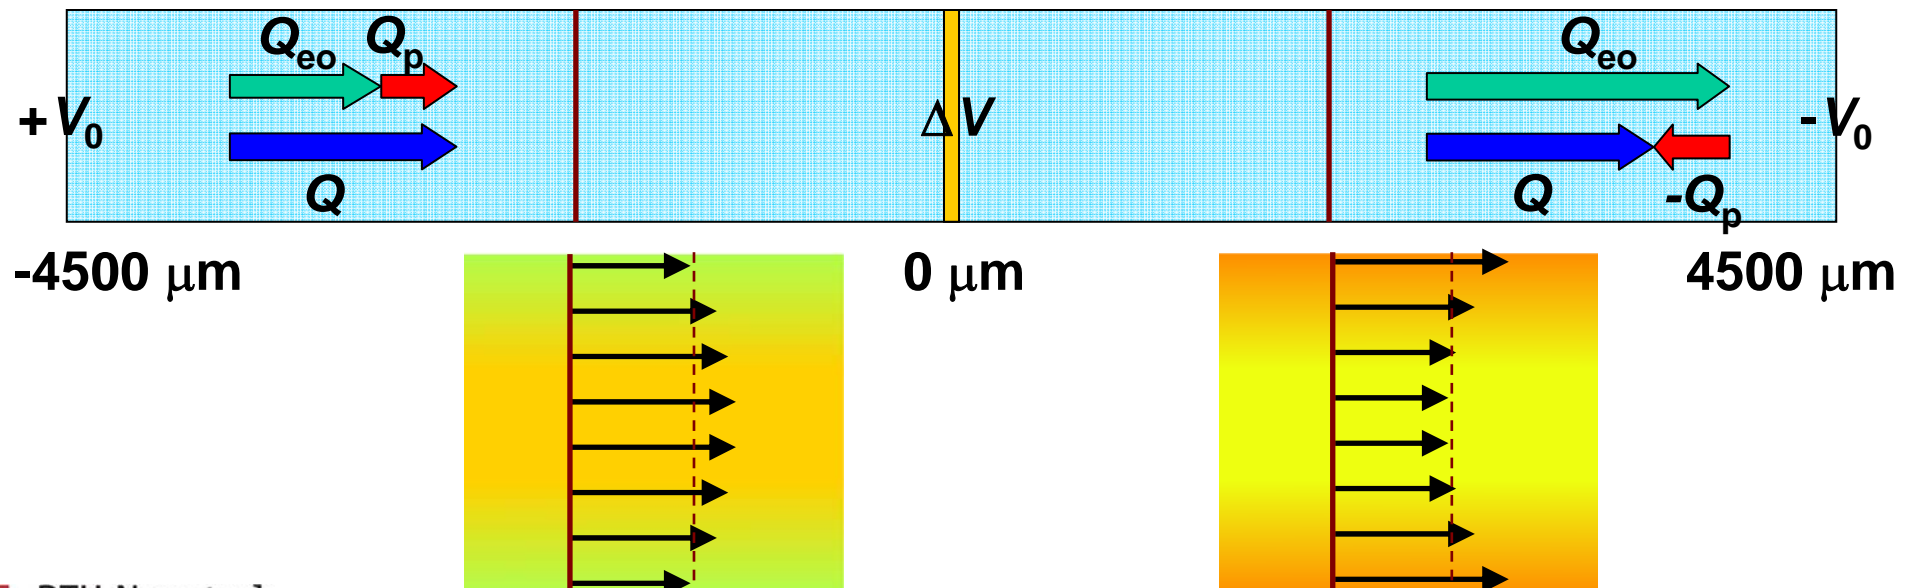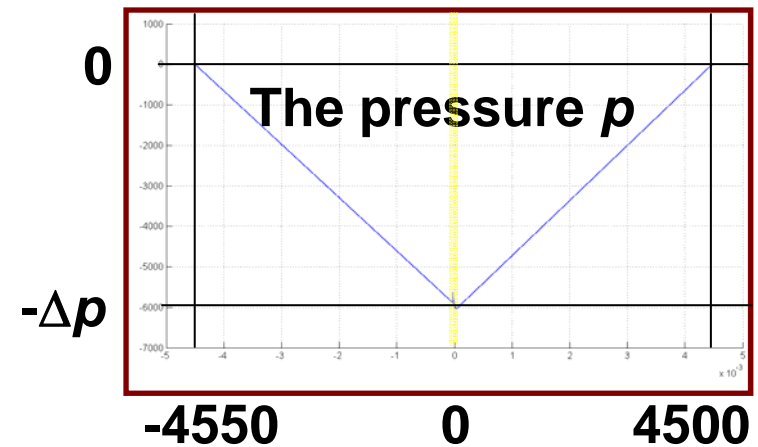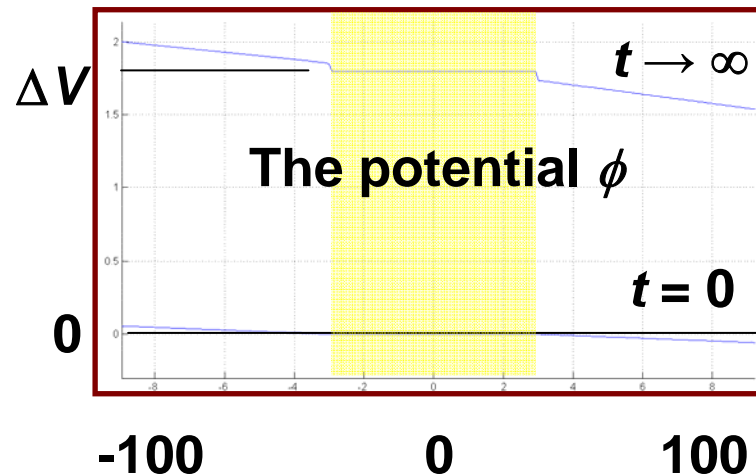


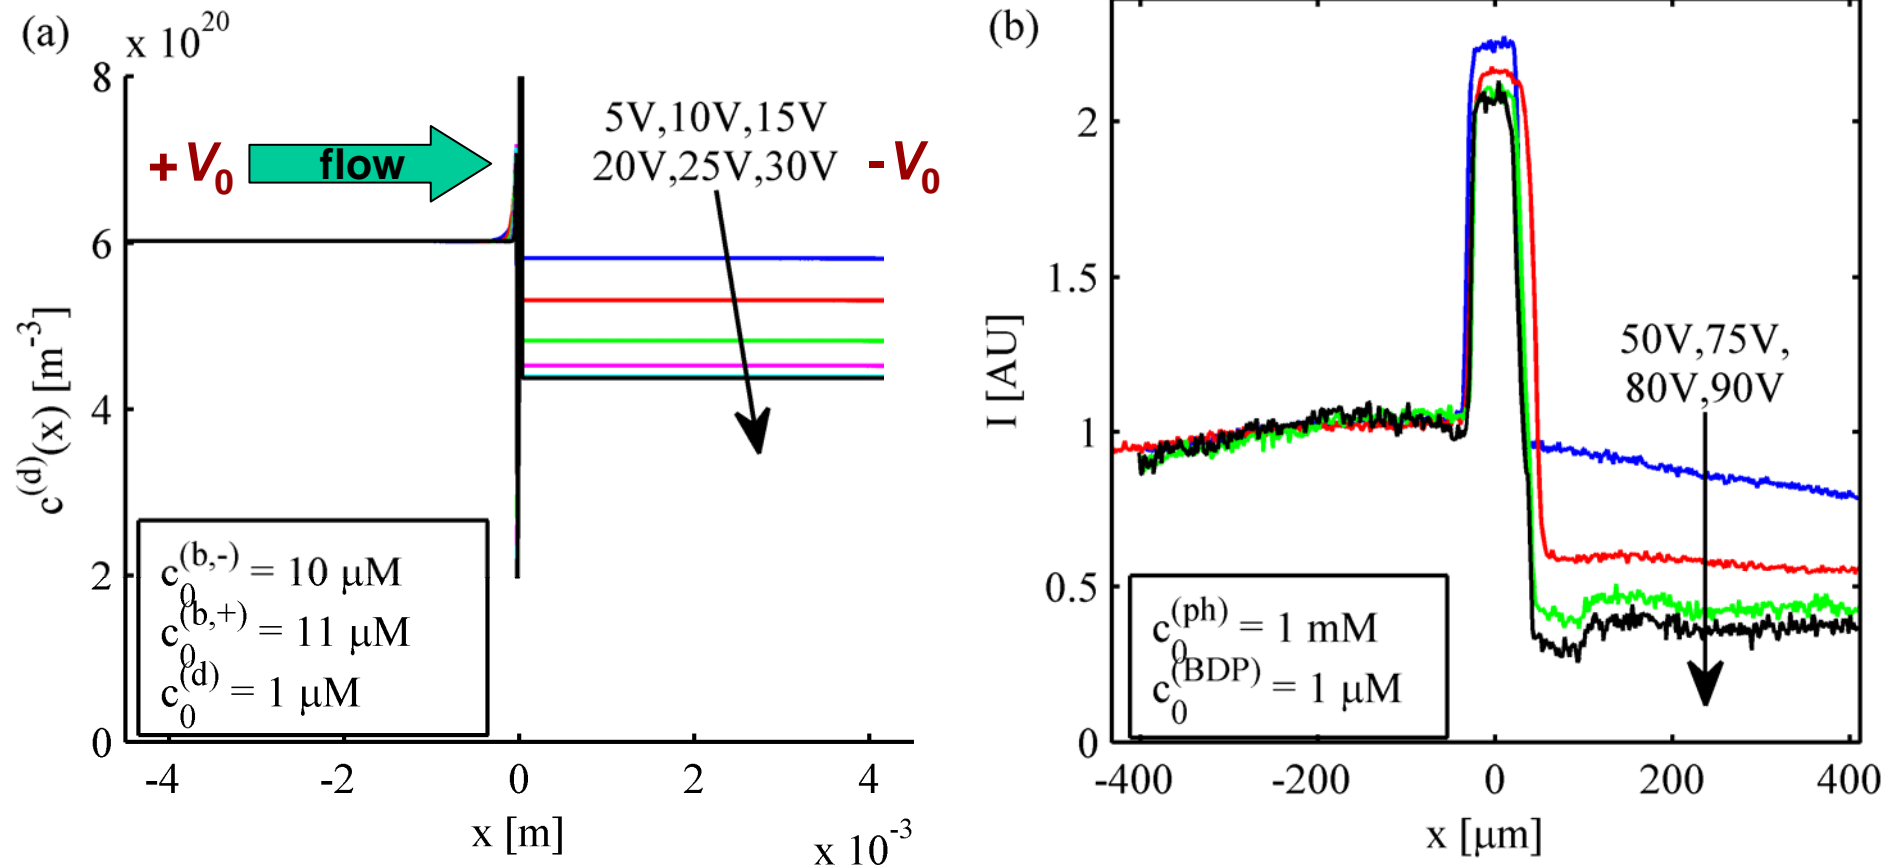

Concluding remarks

- **Experimental setup for observing induced-charge electro-osmosis (ICEO) in micro/nanochannels**
- **Transient development of dye concentration has been measured**
- **Theoretical model combining EO flow with ICEO has been established for extreme aspect ratios**
- **Qualitative agreement between experiments and numerical simulation has been achieved**
- **A good basis for further ICEO studies have been developed and successfully tested**

Theoretical model

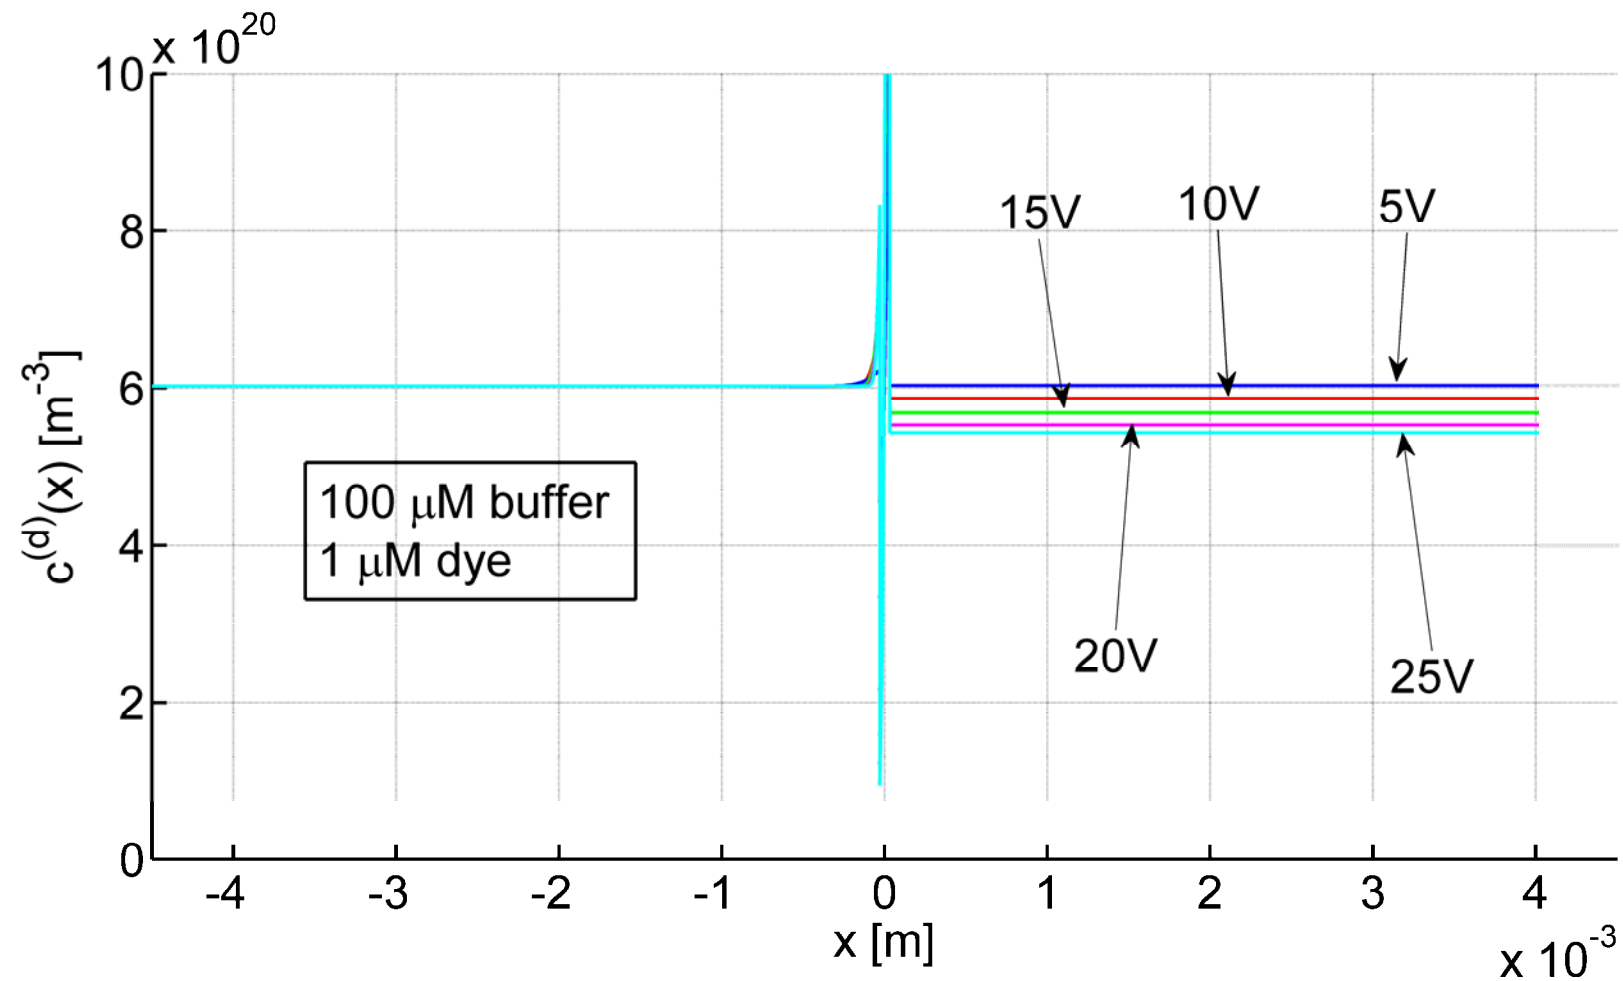

Theoretical model

